

# PFEIFER INDUSTRIES, LLC.

2180 Corporate Lane, Suite 104 ~ Naperville, IL 60563-1639 USA



Phone (630) 596-9000 Fax (630) 596-9002

Email: info@pfeiferindustries.com Website: [www.pfeiferindustries.com](http://www.pfeiferindustries.com)

## (3mm Pitch) Timing Belt Pulley - Face Width Tolerances

Additional amount of timing belt pulley **FACE WIDTH** recommended over **NOMINAL TIMING BELT WIDTH** for various timing belt pitch / timing belt tooth profiles (Add table values to **NOMINAL TIMING BELT WIDTH** for **NOMINAL TIMING BELT PULLEY FACE WIDTH**)

Note: The minimum UNFLANGED pulley width may be reduced when the alignment of the drive can be controlled but shall not be less than the minimum FLANGED pulley width.

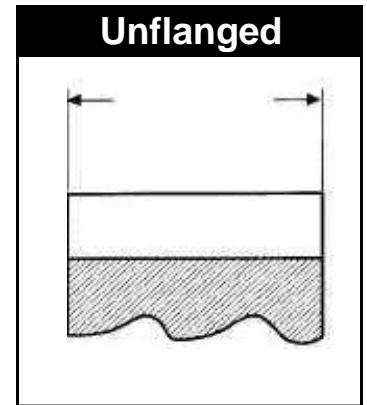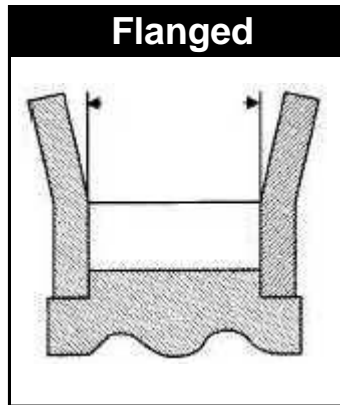

Timing Belt Pitch / Timing Belt Tooth Profile	Nominal Timing Belt Width	Additional Amount of Nominal Pulley Face Width (Flanged)		Additional Amount of Nominal Pulley Face Width (Unflanged)	
		inches	mm	inches	mm

### 3mm Pitch

Timing Belt Pitch / Timing Belt Tooth Profile	Nominal Timing Belt Width	Additional Amount of Nominal Pulley Face Width (Flanged)		Additional Amount of Nominal Pulley Face Width (Unflanged)	
		inches	mm	inches	mm
3mm HTD	6mm	0.059"	+1.5mm	0.157"	+4mm
	9mm	0.059"	+1.5mm	0.157"	+4mm
	15mm	0.059"	+1.5mm	0.157"	+4mm
3mm PowerGrip GT	6mm	0.059"	+1.5mm	0.157"	+4mm
	9mm	0.059"	+1.5mm	0.157"	+4mm
	15mm	0.059"	+1.5mm	0.157"	+4mm
3mm PowerGrip GT2	6mm	0.059"	+1.5mm	0.157"	+4mm
	9mm	0.059"	+1.5mm	0.157"	+4mm
	15mm	0.059"	+1.5mm	0.157"	+4mm
3mm PowerGrip GT3	6mm	0.059"	+1.5mm	0.157"	+4mm
	9mm	0.059"	+1.5mm	0.157"	+4mm
	15mm	0.059"	+1.5mm	0.157"	+4mm

# PFEIFER INDUSTRIES, LLC.

2180 Corporate Lane, Suite 104 ~ Naperville, IL 60563-1639 USA



Phone (630) 596-9000 Fax (630) 596-9002

Email: info@pfeiferindustries.com Website: [www.pfeiferindustries.com](http://www.pfeiferindustries.com)

## (3mm Pitch) Timing Belt Pulley - Face Width Tolerances

Additional amount of timing belt pulley **FACE WIDTH** recommended over **NOMINAL TIMING BELT WIDTH** for various timing belt pitch / timing belt tooth profiles (Add table values to **NOMINAL TIMING BELT WIDTH** for **NOMINAL TIMING BELT PULLEY FACE WIDTH**)

Note: The minimum UNFLANGED pulley width may be reduced when the alignment of the drive can be controlled but shall not be less than the minimum FLANGED pulley width.

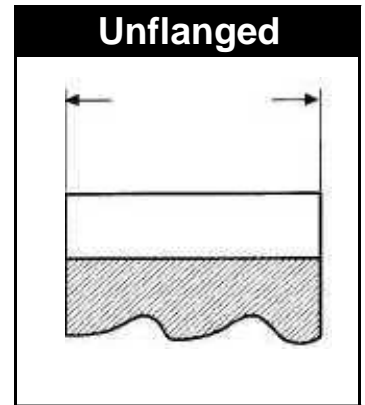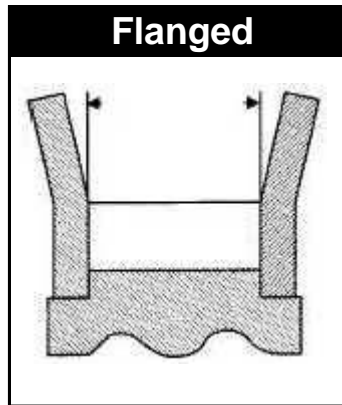

Timing Belt Pitch / Timing Belt Tooth Profile	Nominal Timing Belt Width	Additional Amount of Nominal Pulley Face Width (Flanged)		Additional Amount of Nominal Pulley Face Width (Unflanged)	
		inches	mm	inches	mm
3mm RPP	6mm	0.059"	+1.5mm	0.157"	+4mm
	9mm	0.059"	+1.5mm	0.157"	+4mm
	15mm	0.059"	+1.5mm	0.157"	+4mm
3mm STD	6mm	0.059"	+1.5mm	0.157"	+4mm
	10mm	0.059"	+1.5mm	0.157"	+4mm
	15mm	0.059"	+1.5mm	0.157"	+4mm