

PFEIFER INDUSTRIES, LLC.

2180 Corporate Lane, Suite 104 ~ Naperville, IL 60563-1639 USA



Phone (630) 596-9000 Fax (630) 596-9002

Email: info@pfeiferindustries.com Website: www.pfeiferindustries.com

(5mm Pitch) Timing Belt Pulley - Face Width Tolerances

Additional amount of timing belt pulley **FACE WIDTH** recommended over **NOMINAL TIMING BELT WIDTH** for various timing belt pitch / timing belt tooth profiles (Add table values to **NOMINAL TIMING BELT WIDTH** for **NOMINAL TIMING BELT PULLEY FACE WIDTH**)

Note: The minimum UNFLANGED pulley width may be reduced when the alignment of the drive can be controlled but shall not be less than the minimum FLANGED pulley width.

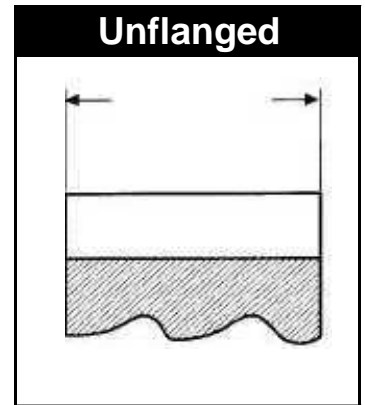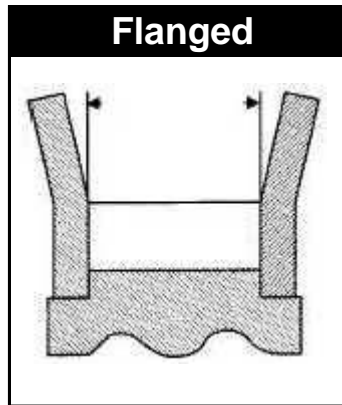

Timing Belt Pitch / Timing Belt Tooth Profile	Nominal Timing Belt Width	Additional Amount of Nominal Pulley Face Width (Flanged)		Additional Amount of Nominal Pulley Face Width (Unflanged)	
		inches	mm	inches	mm

5mm Pitch

Timing Belt Pitch / Timing Belt Tooth Profile	Nominal Timing Belt Width	Additional Amount of Nominal Pulley Face Width (Flanged)		Additional Amount of Nominal Pulley Face Width (Unflanged)	
		inches	mm	inches	mm
5mm HTD	9mm	0.079"	+2mm	0.157"	+4mm
	15mm	0.079"	+2mm	0.157"	+4mm
	25mm	0.079"	+2mm	0.157"	+4mm
5mm PowerGrip GT	9mm	0.079"	+2mm	0.157"	+4mm
	15mm	0.079"	+2mm	0.157"	+4mm
	25mm	0.079"	+2mm	0.157"	+4mm
5mm PowerGrip GT2	9mm	0.079"	+2mm	0.157"	+4mm
	15mm	0.079"	+2mm	0.157"	+4mm
	25mm	0.079"	+2mm	0.157"	+4mm
5mm PowerGrip GT3	9mm	0.079"	+2mm	0.157"	+4mm
	15mm	0.079"	+2mm	0.157"	+4mm
	25mm	0.079"	+2mm	0.157"	+4mm

PFEIFER INDUSTRIES, LLC.

2180 Corporate Lane, Suite 104 ~ Naperville, IL 60563-1639 USA



Phone (630) 596-9000 Fax (630) 596-9002

Email: info@pfeiferindustries.com Website: www.pfeiferindustries.com

(5mm Pitch) Timing Belt Pulley - Face Width Tolerances

Additional amount of timing belt pulley **FACE WIDTH** recommended over **NOMINAL TIMING BELT WIDTH** for various timing belt pitch / timing belt tooth profiles (Add table values to **NOMINAL TIMING BELT WIDTH** for **NOMINAL TIMING BELT PULLEY FACE WIDTH**)

Note: The minimum UNFLANGED pulley width may be reduced when the alignment of the drive can be controlled but shall not be less than the minimum FLANGED pulley width.

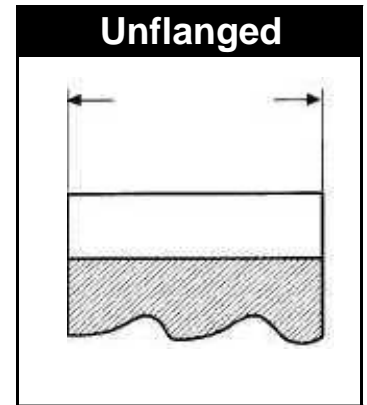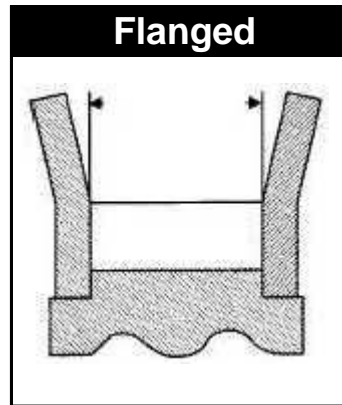

Timing Belt Pitch / Timing Belt Tooth Profile	Nominal Timing Belt Width	Additional Amount of Nominal Pulley Face Width (Flanged)		Additional Amount of Nominal Pulley Face Width (Unflanged)	
		inches	mm	inches	mm
5mm PolyChain GT	9mm	0.079"	+2mm	0.157"	+4mm
	15mm	0.079"	+2mm	0.157"	+4mm
	25mm	0.079"	+2mm	0.157"	+4mm
5mm RPP	9mm	0.079"	+2mm	0.157"	+4mm
	15mm	0.079"	+2mm	0.157"	+4mm
	25mm	0.079"	+2mm	0.157"	+4mm
5mm STD	10mm	0.079"	+2mm	0.157"	+4mm
	15mm	0.079"	+2mm	0.157"	+4mm
	25mm	0.079"	+2mm	0.157"	+4mm